

NEW


FPC50W

– FPC50 WITH AUTOMATIC CHECK WEIGHING & 12" HMI

- Fully automatic check weighing and recalibration of fill weight
- One touch 12" screen/HMI for easy setting of all process parameters
- Capacity up to 20 vials per minute
- Automatic logging of process data
- Peristaltic aseptic filling from 0.1 to 100ml
- No cross contamination
- Disposable Aseptic Fluid Path simplifies validation (DAFPA)
- Universal format parts reduce costs
- Quick and easy change-over between batches



Overview of weighing cell below bottle track

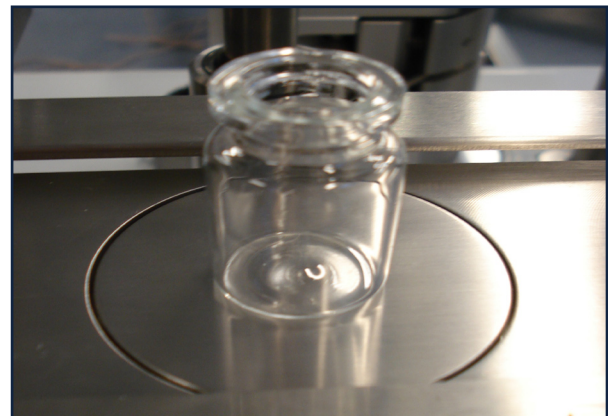

Vial on weighing cell is being tared prior to filling

Watson-Marlow Flexicon

Frejasvej 2-6
DK-4100 Ringsted
Denmark
Tel. +45 57 67 11 55
Fax. +45 57 67 05 41
flexicon@flexicon.dk
www.wmflexicon.dk



FPC50W

Accurate filling during an entire batch – guaranteed

The FPC50W is a new version of the popular FPC50. The FPC50W is equipped with a Wipotec weighing cell, which measures the weight of each individual fill with an accuracy of +/- 0.002g.

The weighing cell is connected to the filling system and thus fully automatic recalibration of the pump during entire batch is ensured.

Easy programming – just one Human Machine Interface

- Easy loading and saving of programs with parameters for specific applications.
- Large 12" touch screen ensures good visibility of applied settings.
- Pass word protection in 3 levels.



Vial on weighing cell

