


NEW

FILLING NOZZLE

– STERILISABLE BY GAMMA IRRADIATION OR AUTOCLAVING

- Available in 7 different inner diameters from Ø0.6 to Ø8.0
- Length allows for bottom-up filling applications
- Surface finish at tip of nozzle prevents dripping
- Meets FDA and USP class VI requirements
- Supplied in Tyvek pouch ready for autoclaving or gamma irradiation
- Packed in ISO Class 8 clean room
- Full material traceability
- Batch specific quality certificate included
- Designed for fast change-over
- Fits standard nozzle holders on Watson-Marlow Flexicon filling machines

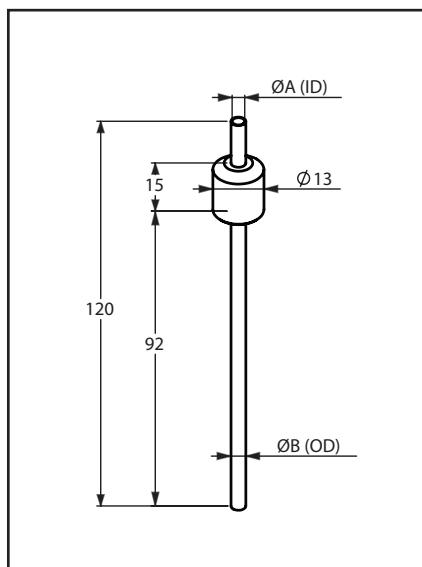

SPECIFICATIONS				
Materials	AISI 316L and PEEK			
	A (ID)	B(OD)	Fill volumes from	Part number
Dimensions in mm	Ø0,6	Ø1,0	0.1 ml	30-040-006
	Ø1,0	Ø1,5	0.5 ml	30-040-010
	Ø1,6	Ø2,1	1.7 ml	30-040-016
	Ø3,2	Ø3,8	6.5 ml	30-040-032
	Ø4,5	Ø5,5	12.0 ml	30-040-045
	Ø6,0	Ø7,0	22.0 ml	30-040-060
	Ø8,0	Ø9,0	35.0 ml	30-040-080
Nozzle holder incl. arm for filling stand				30-700-053
Compliance	FDA USP 31, class VI FDA 21 CFR Part 177.2415, 2008 BSE/TSE free			
Quality certificate	Included			

